



Unser LED Lampen Sortiment

Fragen Sie uns unverbindlich an

info@gl-ae.com

oder

0151/12493842




HLG-240H-36A



LED High Bay Light—100W/120W/150W

Input voltage	100-240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	100W/120W/150W
CRI	≥100lm/W
Beam Angle	Ra>70
CCT	25/60/90 WW: 2700-3200K NW: 4000-4500K PW: 5000-6500K Temperature: -30°C~60°C Humidity: 10%~90%RH

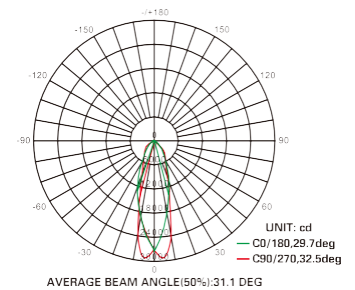


Model		Power(w)	Luminous flux(lm)	IP Rating	Net Weight(Kg)	Chips
LY-HB60100XX	Φ367×459	100	9000	IP65	7	Cree XT-E
LY-HB60120XX	Φ367×459	120	10900	IP65	7	Cree XT-E
LY-HB60150XX	Φ367×459	150	13780	IP65	7	Cree XT-E




LED High Bay Light—200W/300W/400W

Input voltage	100-240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	200W/300W/400W
CRI	≥100lm/W
Beam Angle	Ra>70
CCT	25/60/90 WW: 2700-3200K NW: 4000-4500K PW: 5000-6500K Temperature: -30°C~60°C Humidity: 10%~90%RH

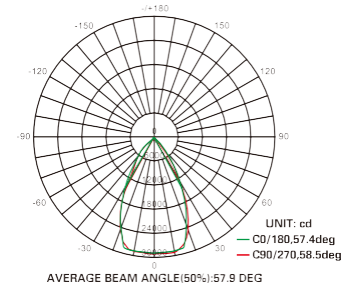


Model		Power(w)	Luminous flux(lm)	IP Rating	Net Weight(Kg)	Chips
LY-HB60200XX	Φ367×459	200	17000	IP65	8.8	Cree XT-E
LY-HB60300XX	Φ367×459	300	25098	IP65	9.1	Cree XT-E
LY-HB60400XX	Φ367×497	400	32500	IP65	9.7	Cree XT-E

LED High Bay Light—500W

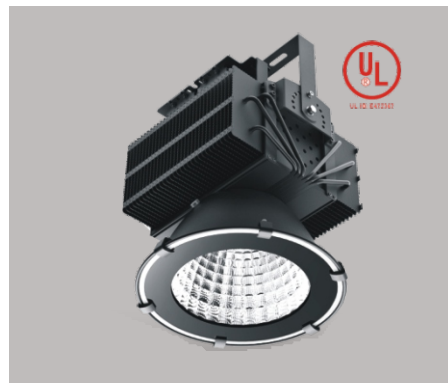

Input voltage	100-240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	500W
CRI	≥100lm/W
Beam Angle	Ra>70
CCT	25/60/90 WW: 2700-3200K NW: 4000-4500K PW: 5000-6500K Temperature: -30°C~60°C Humidity: 10%~90%RH

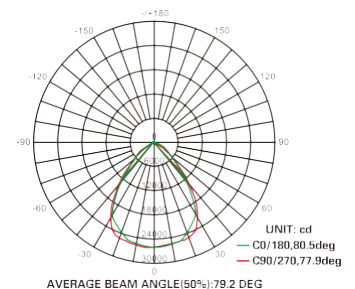

Model		Power(w)	Luminous flux(lm)	IP Rating	Net Weight(Kg)	Chips
LY-HB60500XX	Φ367×497	500W	38800	IP65	10.9	Cree XT-E



CREE

LED High Bay Light

Factory/Gym/Warehouse/Subway/ Place
of business...



CREE COB 3050




Anti-glare Lens



LED High Bay Light —100W/120W



Input voltage	100-240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	100W/120W
CRI	Ra>70
Beam Angle	38/60/90
CCT	WW: 2700-3200K NW: 4000-4500K PW: 5000-6500K Temperature: -30℃~60℃ Humidity: 10% ~ 90%RH

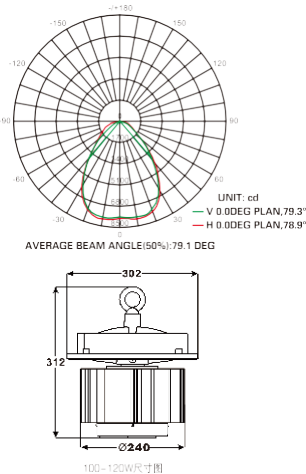


Model	Product Dimension(mm)	Power(w)	Luminous flux(lm)	IP Rating	Net Weight(Kg)	Chips
LY-HB50100XX	L302xW240xH312	100	9800	IP30	5.45	CREE CXA2520
LY-HB50120XX	L302xW240xH312	120	11400	IP30	5.45	CREE CXA2530

LED High Bay Light —150W/180W



Input voltage	100-240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	150W/180W
CRI	≥100lm/W
Beam Angle	Ra>70
CCT	38/60/90 WW: 2700-3200K NW: 4000-4500K PW: 5000-6500K Temperature: -30℃~60℃ Humidity: 10% ~ 90%RH

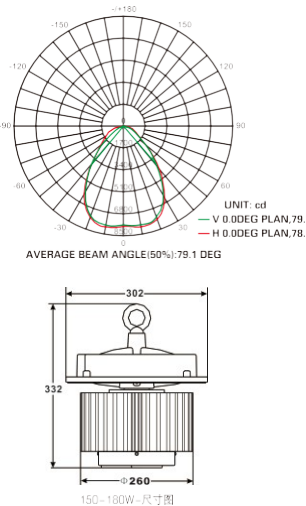

Model	Product Dimension(mm)	Power(w)	Luminous flux(lm)	IP Rating	Net Weight(Kg)	Chips
LY-HB50150XX	L302XW260XH332	150	13345	IP30	6.52	CREE CXA2540
LY-HB50180XX	L302XW260XH332	180	16000	IP30	6.52	CREE CXA3050

CREE

LED High Bay Light





NEW High Bay Light



NEW High Bay Light—70W/100W



Input voltage	100–240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	≥100lm/W
CRI	Ra>75
Beam Angle	25° /45° /60° /90°
CCT	WW:2700–3200K NW:4000–4500K PW:5000–6500K Temperature:–30℃~60℃ Humidity:10%~90%RH





Model	Product Dimension(mm)	Power consumption	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY–HB65070XX	Φ357x342	70W	6300	IP65	3.4
LY–HB65100XX	Φ357x362	100W	9000	IP65	4.6

NEW High Bay Light—150W/200W



Input voltage	100–240V AC 50/60HZ
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	≥100lm/W
CRI	Ra>75
Beam Angle	25° /45° /60° /90°
CCT	WW:2700–3200K NW:4000–4500K PW:5000–6500K Temperature:–30℃~60℃ Humidity:10%~90%RH

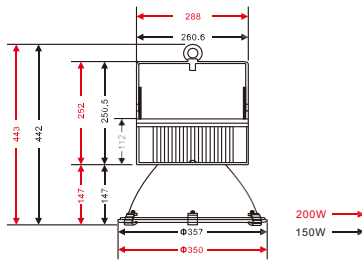

Model	Product Dimension(mm)	Power consumption	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY–HB65150XX	Φ357x398	150W	13600	IP65	5.7
LY–HB65200XX	Φ350x399	200W	18000	IP65	6.6

NEW High Bay Light



LED High Bay Light

- 1、Unique and beautiful looking design.
- 2、Good heat dissipation performance guarantee the long lifespan.
- 3、PC Reflector and PC Lens.By the combination illumination in the tridi-mensional space ,highlight the environment with the sense of the space, and it is full of decorative.
- 4、Waterproof design, eliminating mist, avoiding condensation, improving quality,extending the life span.
- 5、90° , 92%。
Reflector's beam angel 90 ° ,Reflective rate could reach up to 92%.
- 6、Over Current, Over Voltage, Over Heat, Thunder Protection.
- 7、Choice of Correlated Color Temperatures (Specification Re-Defined Accordingly).
- 8、Long lifespan for LED 50, 000 hrs.
- 9、100% Recycle, No Pollution, and UV, IR.





- 1、workshops/ warehouses/ public places/ exhibition halls/ buildings/ gas stations and factories/ shops/ supermarkets, etc.



LED High Bay Light—50W



Input voltage	100-240 AC 50/60Hz
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	≥100lm/W
CRI	≥75
Beam Angle	90°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%-90%RH





Model	Product Dimension(mm)	Power consumption	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-HB31050XX	Φ 325x400	50W	5000lm	IP53	2.07

LED High Bay Light—100W




Input voltage	100-240 AC 50/60Hz
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	≥100lm/W
CRI	≥75
Beam Angle	90°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%-90%RH





Model	Product Dimension(mm)	Power consumption	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-HB31100XX	Φ 345x400	100W	10000lm	IP53	2.77

LED High Bay Light—150W

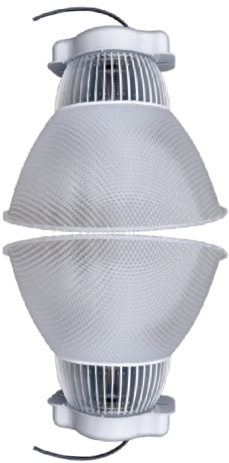

Input voltage	100-240 AC 50/60Hz
Power factor	≥0.95
Power efficiency	≥88%
LED Lumious efficiency	≥100lm/W
CRI	≥75
Beam Angle	90°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%-90%RH



Model	Product Dimension(mm)	Power consumption	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-HB31150XX	Φ 445x410	150W	15000lm	IP53	4.5



New Flat Pad LED Flood Light

Features


- 1、Integrative design for heat sink and housing, The LED is closely connected to the surface. The heat from the LED is removed through the heat dissipation wing and also by air ventilation.
- 2、The surface is passed through anodic oxidation treatment. Its structure is compact and beautiful. It can meet the requirement of IP65. It has good capacity like antisepticising, waterproofing, and dust Prevention.
- 3、Aluminium alloy diecast baking varnish heat sink, clear tempered glass, ensures good heat dissipation.
- 4、Use toughened glass and the light transmittance is about 93%.
VDE/UL listed rubber cable with cold-pressed terminal.
- 6、Safe and easy for installation and maintenance.
- 7、High heat conductivity, low luminous decay, pure light color and no ghosting.
- 8、NO UV and near-IR radiation in the light beam.
- 9、Very low energy consumption, Lower thermal output.
- 10、Durable and long life(50000hours).

Applications

Widely used in shopping mall, exhibition hall, parking lot, playground, gymnasium, billboards, park, sculpture, national green lighting project, building facade and public corridor, stair corridor and other indoor and outdoor lighting.



New Flat Pad LED Flood Light—10W/20W/30W



Input Voltage	AC100-240V 50/60Hz
CRI	>75
Beam Angle	120°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%~90%RH

Model	Power consumption	Luminous flux(lm)	Product Dimension(mm)	IP Rating	Net Weight(Kg)
LY-FL39010XX	10W	1030lm	166*107*32	IP65	0.5
LY-FL39020XX	20W	2040lm	190*152*40	IP65	0.8
LY-FL39030XX	30W	3070lm	227*176*40	IP65	1.0


New Flat Pad LED Flood Light—50W/70W/80W



Input Voltage	AC100-240V 50/60Hz
CRI	>75
Beam Angle	120°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%~90%RH

Model	Power consumption	Luminous flux(lm)	Product Dimension(mm)	IP Rating	Net Weight(Kg)
LY-FL39050XX	50W	5100lm	335*233*50	IP65	1.8
LY-FL39070XX	70W	7250lm	370*250*55	IP65	2.9
LY-FL39080XX	80W	8240lm	370*250*55	IP65	2.9

New Flat Pad LED Flood Light—100W/150W/200W



Input Voltage	AC100-240V 50/60Hz
CRI	>75
Beam Angle	120°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%~90%RH

Model	Power consumption	Luminous flux(lm)	Product Dimension(mm)	IP Rating	Net Weight(Kg)
LY-FL39100XX	100W	10300lm	402*295*60	IP65	4.3
LY-FL39150XX	150W	15300lm	435*355*60	IP65	5.3
LY-FL39200XX	200W	20400lm	470*360*60	IP65	6.4




Slim Line LED Flood Light



Slim Line LED Flood Light 10W



Input voltage	100-240V AC 50/60HZ
Power factor	≥0.9
Power efficiency	≥82%
LED Lumious efficiency CRI	10W
Beam Angle	≥100lm/W
CCT	Ra>75
Operational condition	120° WW:2700-3200K NW:4000-4500K PW:5000-6000K Temperature:-30℃~60℃ Humidity:10%~90%RH

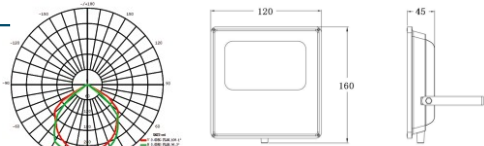


Model	Power consumption	Product Dimension(mm)	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-F135010XX	10W	160*120*45	9001m	IP65	0.5

Slim Line LED Flood Light 30W



Input voltage	100-240V AC 50/60HZ
Power factor	≥0.9
Power efficiency	≥82%
LED Lumious efficiency CRI	30W
Beam Angle	≥100lm/W
CCT	Ra>75
Operational condition	120° WW:2700-3200K NW:4000-4500K PW:5000-6000K Temperature:-30℃~60℃ Humidity:10%~90%RH

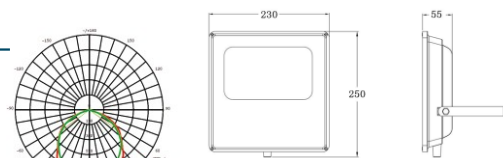


Model	Power consumption	Product Dimension(mm)	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-F135030XX	30W	250*230*55	28001m	IP65	1.5

Slim Line LED Flood Light 50W 80W



Input voltage	100-240V AC 50/60HZ
Power factor	≥0.9
Power efficiency	≥82%
LED Lumious efficiency CRI	≥100lm/W
Beam Angle	Ra>75
CCT	120°
Operational condition	WW:2700-3200K NW:4000-4500K PW:5000-6000K Temperature:-30℃~60℃ Humidity:10%~90%RH

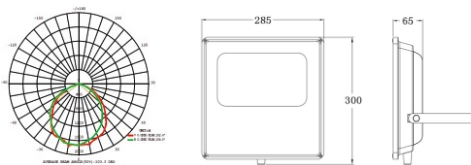

Model	Power consumption	Product Dimension(mm)	Luminous flux(lm)	IP Rating	Net Weight(Kg)
LY-F135050XX	50W	300*285*65	48001m	IP65	2.2
LY-F135080XX	80W	318*286*90	73001m	IP65	3.5

Slim Line LED Flood Light



LED Canopy Light

- 1、The shell with the anodic oxidation treatment, strong corrosion resistance.
- 2、Adoption LEYOND exclusive Lens with light transmittance up to 98%.
- 3、Perfect Light Distribution Solution：Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity.
- 4、There are 24°、36°、60°、90°、160° beam angle options for the Lens.
- 5、Scientifically-designed heat dissipater with much better cooling effect.
- 6、High luminous efficiency，Whole lamp output light efficiency >120LM/W.
- 7、High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification.
- 8、For the traditional light source such as the High Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for LED light, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection.
- 9、Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body.
- 10、The CCT of Warm white、Neutral white、Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.


Gas Station、Factory、Warehouse、Shopping Mall、Gymnasium、Plant Area | Petro、Station Conference Centers、Shopping Mall、Garage、Workshop Station



LED Canopy Light-100W



输入电压 Input Voltage	100~240V AC, 50/60Hz
功率因数 Power factor	>0. 98
电源效率 Power efficiency	>90%
功率 Power	100W
LED光效 Luminous efficiency	120lm/W
显色指数 CRI	≥65
发光角度 Beam Angle	24° 36° 60° 90° 160°
色温 CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
工作条件 Operational condition	Temperature:-30℃~60℃ Humidity:10%~90%RH




Model	Modules number	Product Dimension(mm)	Power consumption(W)	Luminous flux	Net Weight(Kg)
LY-YL11100PW	2	400*312*98	100	12000lm	6. 5

LED Canopy Light-150W



Input voltage	100~240V AC, 50/60Hz
Power factor	>0. 98
Power efficiency	>90%
LED Lumious efficiency	150 W
CRI	120lm/W
Beam Angle	24° 36° 60° 90° 160°
CCT	WW:2700-3200K NW:4000-4500K PW:5000-6500K
Operational condition	Temperature:-30℃~60℃ Humidity:10%~90%RH

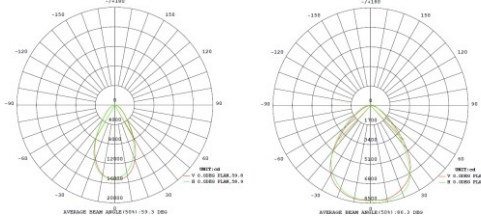

Model	Modules number	Product Dimension(mm)	Power consumption(W)	Luminous flux	Net Weight(Kg)
LY-YL10150PW	3	400*400*98	150	18000lm	7. 9



LED Canopy Light